

Beyer TR/BV 3.70.2.15.006 buid for AMPEX USA from Beyerdynamics

Input 200 Ohms / output 45 K Ohms

Two split bifilary wound primaries

Turn ratio 1:15 Freqüenz 30 - 15.000 Hz +/- 1 dB

Pin 1 = blue = start output

Pin 2 = Yellow = end output


Pin 3 = braun / clear = metall

Pin 4 = black = end wound primaries I

Pin 5 = white = start wound primaries I

Pin 6 = green = end wound primaries II

Pin 7 = red = start wound primaries II

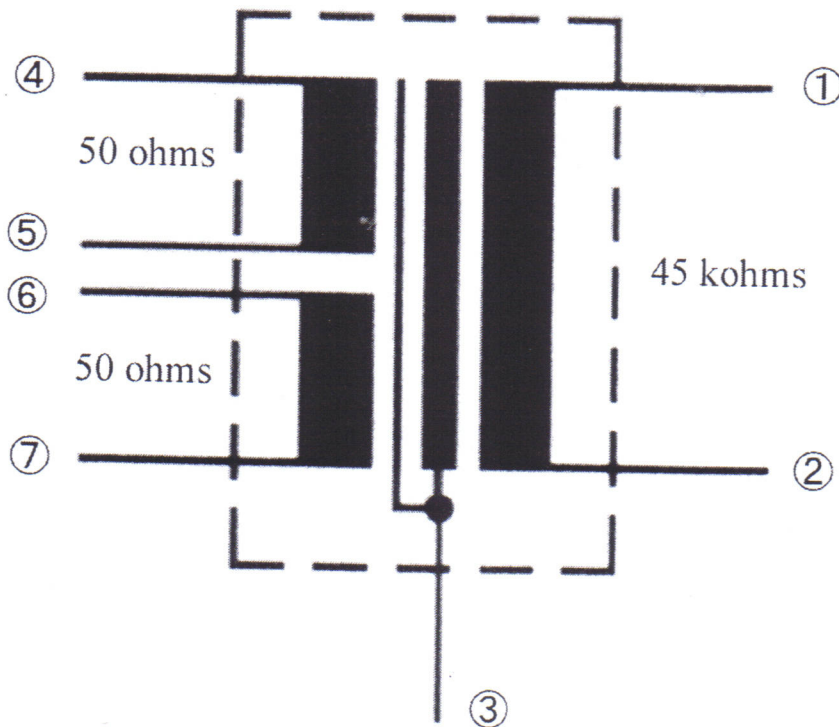

More Info see PDF- Katalog Page 6 picture 4 ( numbering system ) and page 8 / RG = 200 Ohms / end number 15.006!!